

XLP 50x SERIES LABEL PRINTER

Industrial all-round label printers for printing barcodes, fonts and graphics in high quality

The XLP 50x Label Printer series is the perfect print solution for medium label volume applications, available in 4 and 6 inch print width. It can be used with thermal transfer or thermal direct technology and prints high quality barcodes, fonts, and graphics on a large variety of label materials: (coated) papers, PE/PP or cardboard. Due to its flexibility the XLP 50x is ready for numerous applications and will support your identification and traceability processes, mainly related to primary and secondary packaging in the following industries

- Food manufacturing & processing
- General distribution and logistics
- Consumer goods
- General manufacturing
- Pharmaceuticals
- Electronics
- Ticketing



Benefits with the XLP 50x

Increased
Productivity

Reduced
Downtimes

High
Print Quality

Convenient
Maintenance

Ultimate Use
Friendliness

Quality without compromises

We trust in the quality of XLP 50x – developed and manufactured in Germany, the XLP 50x series comes with **2 years warranty**. Convince yourself of its robust housing and durable components that withstand harsh industrial environments. These ensure a reliable, continuous and efficient operation even under demanding conditions.

Operator Convenience

The included quick start guide enables an easy and fast set up of the XLP 50x. Operators can effortlessly navigate through the icon and text driven menu on a large multicolor display.

Comprehensive Ribbon Portfolio


The recommended supplement for a perfect print result: our thermal transfer ribbons are optimized for the XLP 50x. Available from stock, a large selection of sizes and qualities can be ordered with short lead times and at low minimum order quantities. Order your free sample kit today!



XLP 50x SERIES


Ultimate User Friendliness

- Large display with different colored backlights to indicate printer status
- Operator friendly and intuitive icon-driven menu navigation
- Large window to keep an overview of label and ribbon roll filling level
- Various data interfaces for flexible integration in existing IT infrastructure




High Print Quality

- Choose between 203, 300 or 600* dpi for high print quality on a large selection of label materials, sizes and shapes
- 600* dpi print resolution enables printing of also tiny fonts, demanding barcodes and any types of symbols
- Self adjusting ribbon mandrels to ensure stable ribbon web tension for optimal print results




*600 dpi print resolution available for XLP 504 only

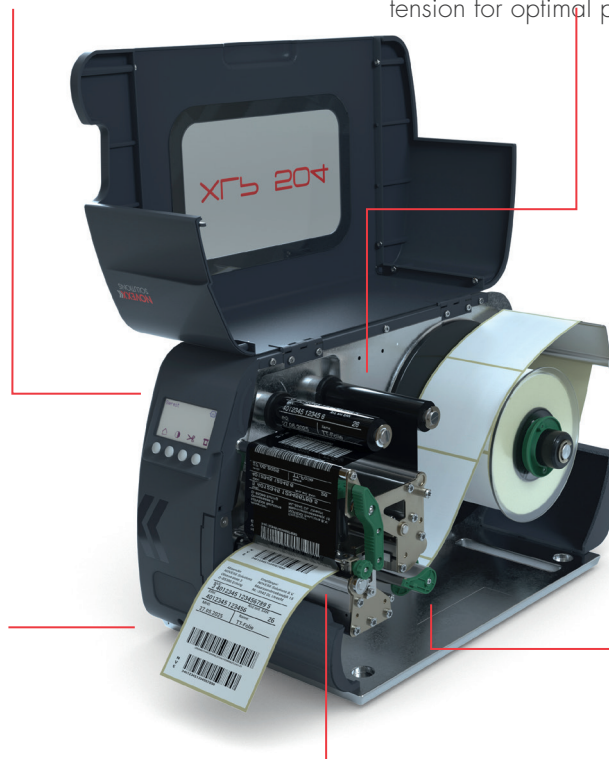


Increased Productivity

- Printing 1,000 labels at 203 dpi in less than eight minutes *
- High flexibility for future adjustments of your needs via optional add-ons



Reduced Downtimes

- Lift-up print module for quick and comfortable label and ribbon loading
- Qualified for high capacity ribbon rolls up to 500 m length



Convenient Maintenance

- Quick shaft coupling print roller enables fast cleaning without the need for tools
- Easily accessible print head

Technical specifications						
	XLP 504			XLP 506		
PRINT OUTPUT						LABEL ROLL SIZE
Print resolution (dpi)	203	300	600	203	300	Outer diameter max. 210 mm
Time per 1,000 labels in min.*	7	9	17	9	11	Core diameter 38 mm, 76 mm, 101 mm (1.5", 3", 4")
LABEL WIDTH						RIBBON SIZE
Standard	15 to 120 mm		50 to 185 mm		Length	max. 500 m
Dispenser	30 to 110 mm		50 to 170 mm		Width	25 to 110 mm
PRINT WIDTH						PRINTING METHOD
	max. 105.7 mm		max. 168 mm		Thermal direct/thermal transfer	
LABEL TYPE						OPTIONS
Converted, self-adhesive label material on roll or fan folded: paper, thermal transfer/direct, plastic film material (e.g. PE, PP, PA, PVC)						Dispenser with internal rewinder, cutter, I/O board RS 422/485, LTSA applicator, Textile Cutter Stacker
						Dispenser with internal rewinder, cutter, I/O board RS 422/485

* 100 x 100 mm labels, feed 2 mm

The information contained herein is believed to be reliable but NOVEXX Solutions makes no representations concerning the accuracy or correctness of the data. The information, like any other should be confirmed independently for the particular end user conditions to ensure the proposed labeling meets the relevant requirements and regulations. © 2018 Novexx Solutions GmbH, All Rights Reserved. Third party trademarks and/or trade names may be used herein are the property of their respective owner(s).